

GM

COMPACT UNDERCOUNTER GLASSWASHER

WASHTECH®



STANDARD FEATURES

- 1, 2 and 3 minute cycles
- Wash capacity of up to 960 glasses per hour
- Compatible with 365mm to 450mm racks
- Touchscreen controls providing advanced customisation
- 0.3HP soft start wash pump
- Dual chemical pumps
- Hands-free drainage system with sump and drain pump
- Stainless steel wash and drain filter basket
- Customisable auto-drain and self-cleaning functionality
- Selectable cold rinse*
- Adjustable tilting rack slide
- Independent wash and rinse arms
- Heavy-duty stainless steel construction

- 1x 450mm dish rack (600 70081)
- 1x 450mm cup rack (600 70080)
- 1x cutlery container (C660503)
- 1x quick connection kit (all hoses and 1p/15A plugset)

SPECIFICATIONS

A - Hot Water


Temperature	65°C
Connection	3/4" male, hose supplied
Pressure	200-500kPa
Flow	20L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.2L per cycle**

D - Drainage

Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical

	V	Hz	A/ph	Max kW
Single phase	230-240	50	15	3.25

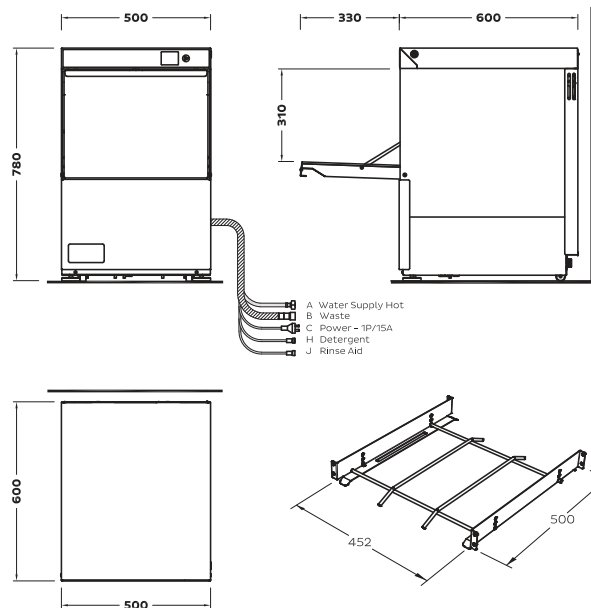

Dimensions

	Machine	Packed
Width (mm)	500	560
Depth (mm)	600	650
Height (mm)	780	915
Weight (kg)	47	57
Volume (m3)		0.33

Water Quality

	Min	Max
pH	7	8
TDS	1	135
Cl-		100
SO4		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl2		0.1

Isolating switch must be within 1m of, and not directly behind, the machine
Refer to operator manual for installation instructions

*Requires cold water feed, see Operator Manual for instructions.
**Water consumption rates may vary based on site conditions

In line with policy to continually develop and improve its products,
Washtech reserves the right to change specifications and design without
notice.



moffat.com.au | 1300 269 801



Manufactured in New Zealand by Washtech Limited - Distributed in Australia by Moffat PTY Limited
© Copyright Washtech Limited / Washtech GM Series-8 / WGM0040 / Feb-25

an Ali Group Company



the spirit of excellence