

UD

UNDERCOUNTER DISHWASHER

WASHTECH®



STANDARD FEATURES

- 1, 2 and 3 minute cycles
- Compatible with 365mm to 500mm racks
- Wash capacity of up to 1,080 plates per hour
- Touchscreen controls providing advanced customisation
- 0.5HP soft start wash pump
- Dual chemical pumps
- Hands-free drainage system with sump and drain pump
- Heavy-duty stainless steel scrap tray and waste basket
- Customisable auto-drain and self-cleaning functionality
- Adjustable tilting rack slide
- Independent wash and rinse arms
- Heavy-duty stainless steel construction

- 1x 500mm dish rack (600 70028)
- 1x 500mm cup rack (600 70029)
- 1x cutlery container (C660503)
- 1x quick connection kit (all hoses and 1p/15A plugset)

SPECIFICATIONS

A - Hot Water




Temperature	65°C
Connection	3/4" male, hose supplied
Pressure	200-500kPa
Flow	20L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.2L per cycle*

D - Drainage

Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical

Single phase	V	Hz	A/ph	Max kW
	230-240	50	15	3.37

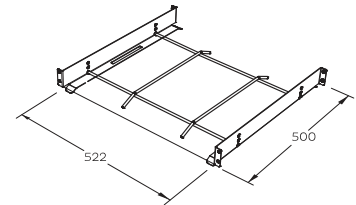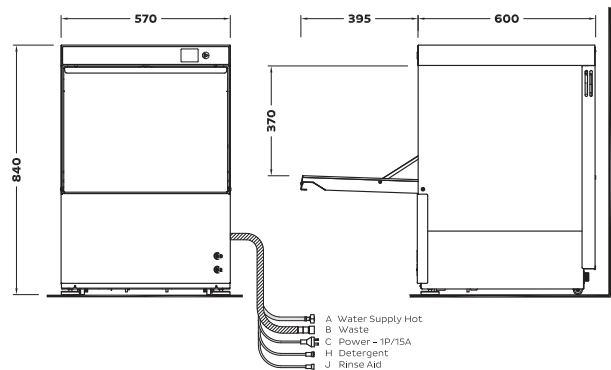

Dimensions

	Machine	Packed
Width (mm)	570	620
Depth (mm)	600	675
Height (mm)	840	940
Weight (kg)	75	78
Volume (m3)		0.39

Water Quality

	Min	Max
pH	7	8
TDS	1	135
Cl-		100
SO4		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl2		0.1

Isolating switch must be within 1m of, and not directly behind, the machine
Refer to operator manual for installation instructions

*Water consumption rates may vary based on site conditions

In line with policy to continually develop and improve its products,
Washtech reserves the right to change specifications and design without
notice.



moffat.com.au | 1300 269 801



Manufactured in New Zealand by Washtech Limited - Distributed in Australia by Moffat PTY Limited
© Copyright Washtech Limited / Washtech UD Series-9 / WUD0040 / Feb-25

an Ali Group Company



the spirit of excellence